



A VERSATILE &
RELIABLE SOLUTION
— optipro[™] SMDB —
CATALOGUE

—optipro™ SMDB—

(Sub-Main Distribution Board)

Optipro SMDB is used for distributing electrical power supplies of up to 630A. It is equipped with over current protection device i.e MCCB, both as an incomer and multiple outgoing ways. In addition to safe & reliable distribution, the range meets the demands within modern commercial buildings, public buildings, educational institutes, hospitals, manufacturing units & also address the application requirement's such as energy management & metering.

These factory-built assemblies are manufactured at our plant which has ISO-9001 & ISO-14001 certification

This all new range is certified as per IEC 61439 - 1 & 2 from NABL accredited laboratory. The modular design offers easy handling and fast installation. Busbar assembly is suitable for high short circuit withstanding current (Icw) upto 50kA/1sec. The range features bus bar rating upto 630A, outgoing devices upto 250A & has an option to metering the incoming supply. Optipro SMDB has enough space that ensures easy maintenance and cabling work. It also offers high performance protection of commercial and industrial buildings, with the availability of add-on enclosures such as metering unit, multiple-cable alleys and corner unit.





Main Features :

- Highly reliable & tested solution as per IEC 61439-1 & 2 from a NABL accredited laboratory
- 3 frame Sizes: SMDB250, SMDB400 & SMDB630
- Modular, versatile solution accommodate different sizes & configuration to meet application needs
- Wide range: 4W / 6W / 8W / 12W
- Configurations available in both 3P / 4P & SD / DD
- Suitable to install fixed or adjustable type MCCB's
- Copper bus-bars can withstand high SC current up to 50kA / 1sec
- Digital meters (A&V) are provided along with phase indicators as standard
- Option to add MFM & Annunciator in metering unit
- Padlocking at main door, facilitates more safety, by avoiding the access of unauthorized person
- Degree of protection: IP43 in Double Door & IP30 in Single Door design
- Mechanical Impact strength: IK09
- Shrouding at the busbars prevents accidental contact with the LIVE parts
- Isolated 100% Neutral is provided on both sides
- To avoid shocks, solid earthing is provided on the every hinged door to complete the circuit
- Ample space in enclosure, helps during termination & maintenance work

Compliance :

SMDB:

IEC 61439 1 & 2
IEC 60529

MCCB:

IEC 60947-2


Range :

SMDB 250


SMDB 400

SMDB 630

Standard finish has epoxy
powder coating in 7541C pantone shade

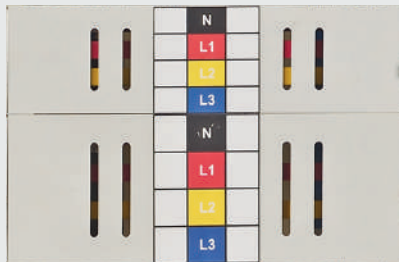


The busbar assembly is fully covered behind the moulded shrouds, providing high user safety.

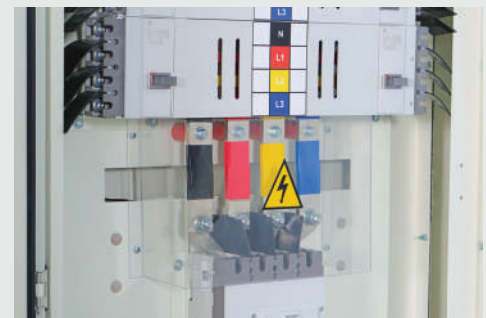

Shrouding at busbars prevents the accidental contact with the LIVE parts

Metering unit comprises of digital ammeter & voltmeter along with phase indicators on the front side as standard

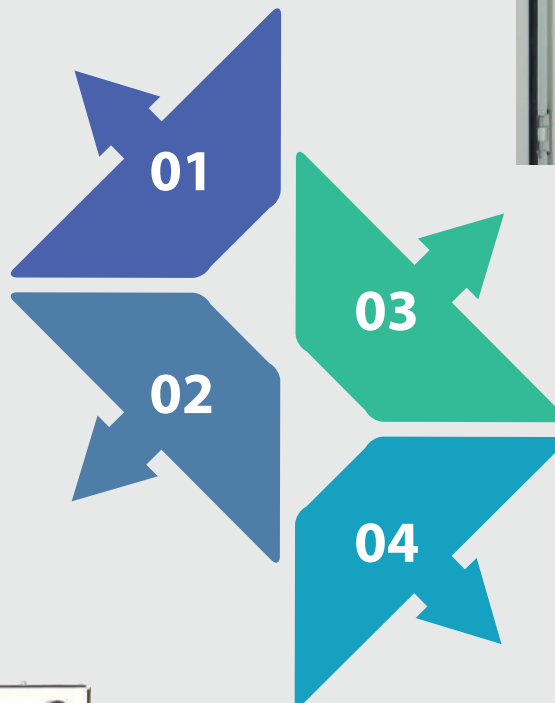

Padlocking on main door facilitates more safety. Door locks with inbuilt handles are also provided on all additional units for ease access






IP43 degree of protection is available with Double Door enclosure

In Optipro SMDB, separate earth bar & isolated neutral bars are provided on both sides, with required termination points to simplify the connections



Separate shield are provided on incomer & outgoing MCCB's that offers IP20 protection even after opening of main door. This also enhances the safety during maintenance work on incomer or outgoing circuit

To avoid shocks, solid earthing is provided on the every hinged door to complete the circuit



Removable gland plates (on top, bottom & both sides) are provided, eases the entry of cables & fitment of accessories

Easy to accommodate the different frame sizes of MCCB's to meet application needs



Technical Details

Technical Specification of Optipro SMDB				
S.No.	Features	Fixed type MCCB's		
		250A	400	630A
1	Ref. Standard	as per IEC 61439-2		
2	Pan assembly material	Tinned Copper	Tinned Copper	Tinned Copper
3	Pan assembly nominal rating	250A	400	630
4	Rated operation voltage (Ue)	415V	415V	415V
5	Rated frequency (Hz)	50Hz	50Hz	50Hz
6	Neutral & earth bar Capacity	N:100% of Phase & Earth : 50% of Phase	N:100% of Phase & Earth : 50% of Phase	N:100% of Phase & Earth: 50% of Phase
7	Rated insulation voltage (Ui)	690V	690V	690V
8	Ambient temperature	40°C	40°C	40°C
9	Incomer MCCB rating	up to 250A	up to 400A	up to 630A
10	Incomer MCCB poles	TP/FP	TP/FP	TP/FP
11	Outgoing MCCB Frames	up to 125A	up to 250A	up to 250A
12	Outgoing MCCB Poles	TP/FP	TP/FP	TP/FP
13	No. of Ways	4, 6, 8 & 12 Way	4, 6, 8 & 12 Way	4, 6, 8 & 12 Way
14	Ingress Protection	IP30/IP43	IP30/IP43	IP30/IP43
15	Mechanical Strength	IK09	IK09	IK09
16	Indication lamp	ON/OFF (Optional)	ON/OFF (Optional)	ON/OFF (Optional)
17	Metering	Digital (Optional)	Digital (Optional)	Digital (Optional)
18	Cable entry	Bottom	Bottom	Bottom
19	Optional Accessories	Cable alleys (sides and bottom and corner units)	Cable alleys (sides and bottom and corner units)	Cable alleys (sides and bottom and corner units)
20	Mounting	Floor/Wall mounting		

Technical Specification of Optipro SMDB

Adjustable type MCCB's

250A

400

630A

as per IEC 61439-2

Tinned Copper

Tinned Copper

Tinned Copper

250A

400

630

415V

415V

415V

50Hz

50Hz

50Hz

N:100% of Phase &
Earth : 50% of Phase

N:100% of Phase &
Earth : 50% of Phase

N:100% of Phase &
Earth: 50% of Phase

690V

690V

690V

40°C

40°C

40°C

upto 250A

upto 400A

up to 630A

TP/FP

TP/FP

TP/FP

upto 125A

upto 250A

up to 250A

TP/FP

TP/FP

TP/FP

4,6,8 & 12 Way

4,6,8 & 12 Way

4,6,8 & 12 Way

IP30/IP43

IP30/IP43

IP30/IP43

IK09

IK09

IK09

ON/OFF (Optional)

ON/OFF (Optional)

ON/OFF (Optional)

Digital (Optional)

Digital (Optional)

Digital (Optional)

Bottom

Bottom

Bottom

Cable alleys (sides and
bottom and corner units)

Cable alleys (sides and
bottom and corner units)

Cable alleys (sides and
bottom and corner units)

Floor/Wall mounting

Optipro SMDB Catalogue References

SMDB 250				TP (Single Door)	FP (Single Door)
SMDB 250 - Incomer	Ways	Outgoing Configuration		SMDB Main Encl. Cat. Refs.	SMDB Main Encl. Cat. Refs.
Optium F2 MCCB	4W	F1-4	-	812100	812105
	6W	F1-6	-	812101	812106
	8W	F1-8	-	812102	812107
	12W	F1-12	-	812103	812108
SMDB 250				TP (Single Door)	FP (Single Door)
SMDB 250 - Incomer	Ways	Outgoing Configuration		SMDB Main Encl. Cat. Refs.	SMDB Main Encl. Cat. Refs.
Optium F3 MCCB	4W	F1-4	-	812110	812115
	6W	F1-6	-	812111	812116
	8W	F1-8	-	812112	812117
	12W	F1-12	-	812113	812118
SMDB 400				TP (Single Door)	FP (Single Door)
SMDB 400 - Incomer	Ways	Outgoing Configuration		SMDB Main Encl. Cat. Refs.	SMDB Main Encl. Cat. Refs.
Optium F4(400A) MCCB	4W	F1-4	-	812120	812128
	6W	F1-6	-	812121	812129
	8W	F1-8	-	812122	812130
	12W	F1-12	-	812123	812131
	8W	F1-6	F2-2	812124	812132
	12W	F1-8	F2-4	812125	812133
	12W	F1-10	F2-2	812126	812134
SMDB 630				TP (Single Door)	FP (Single Door)
SMDB 630 - Incomer	Ways	Outgoing Configuration		SMDB Main Encl. Cat. Refs.	SMDB Main Encl. Cat. Refs.
Optium F4(630A) MCCB	4W	F1-4	-	812136	812144
	6W	F1-6	-	812137	812145
	8W	F1-8	-	812138	812146
	12W	F1-12	-	812139	812147
	8W	F1-6	F2-2	812140	812148
	12W	F1-8	F2-4	812141	812149
	12W	F1-10	F2-2	812142	812150

Optipro SMDB Catalogue References

SMDB 250				TP (Double Door)	FP (Double Door)
SMDB 250 - Incomer	Ways	Outgoing Configuration		SMDB Main Encl. Cat. Refs.	SMDB Main Encl. Cat. Refs.
Optium F2 MCCB	4W	F1-4	-	812181	812186
	6W	F1-6	-	812182	812187
	8W	F1-8	-	812183	812188
	12W	F1-12	-	812184	812189
SMDB 250				TP (Double Door)	FP (Double Door)
SMDB 250 - Incomer	Ways	Outgoing Configuration		SMDB Main Encl. Cat. Refs.	SMDB Main Encl. Cat. Refs.
Optium F3 MCCB	4W	F1-4	-	812191	812196
	6W	F1-6	-	812192	812197
	8W	F1-8	-	812193	812198
	12W	F1-12	-	812194	812199
SMDB 400				TP (Double Door)	FP (Double Door)
SMDB 400 - Incomer	Ways	Outgoing Configuration		SMDB Main Encl. Cat. Refs.	SMDB Main Encl. Cat. Refs.
Optium F4(400A) MCCB	4W	F1-4	-	812201	812209
	6W	F1-6	-	812202	812210
	8W	F1-8	-	812203	812211
	12W	F1-12	-	812204	812212
	8W	F1-6	F2-2	812205	812213
	12W	F1-8	F2-4	812206	812214
	12W	F1-10	F2-2	812207	812215
SMDB 630				TP (Double Door)	FP (Double Door)
SMDB 630- Incomer	Ways	Outgoing Configuration		SMDB Main Encl. Cat. Refs.	SMDB Main Encl. Cat. Refs.
Optium F4(630A) MCCB	4W	F1-4	-	812217	812225
	6W	F1-6	-	812218	812226
	8W	F1-8	-	812219	812227
	12W	F1-12	-	812220	812228
	8W	F1-6	F2-2	812221	812229
	12W	F1-8	F2-4	812222	812230
	12W	F1-10	F2-2	812223	812231

Optipro SMDB Catalogue References

Description				Cat. Refs. (Single Door)	Cat. Refs. (Double Door)
Bottom Cable Entry Unit(SMDB 250,SMDB400 & SMDB630 with F1 o/g only)				812152	812233
Bottom Cable Entry Unit(for SMDB400 & SMDB630, with F1 & F2 o/g)				812153	812234
Left/Right Cable Alley (SMDB 250A) ;	Ways	Outgoing Configuration		Cat. Refs. (Single Door)	Cat. Refs. (Double Door)
	4W	F1-4	-	812154	812235
	6W	F1-6	-	812155	812236
	8W	F1-8	-	812156	812237
	12W	F1-12	-	812157	812238
Left/Right Cable Alley(SMDB 400A/SMDB 630A I/C) ;	Ways	Outgoing Configuration		Cat. Refs. (Single Door)	Cat. Refs. (Double Door)
	4W	F1-4	-	812159	812240
	6W	F1-6	-	812160	812241
	8W	F1-8	-	812161	812242
	12W	F1-12	-	812162	812243
	8W	F1-6	F2-2	812163	812244
	12W	F1-8	F2-4	812164	812245
	12W	F1-10	F2-2	812165	812246
Metering Unit with AV&I (for SMDB250,SMDB400 & SMDB630,with F1 o/g only)				812167	812248
Metering Unit with AV&I (for SMDB400 & SMDB630 ,with F1 & F2 o/g)				812168	812249
Metering Unit with MFMA&I (for SMDB250,SMDB400 & SMDB630,with F1 o/g)				812169	812250
Metering unit with MFMA&I (for SMDB400 & SMDB630 ,with F1 & F2 o/g)				812170	812251
Corner Unit				812171	812252

Dimensional Details



SMDB 250	Ways	Outgoing Configuration		'A" in mm	'B" in mm (TPN/FP)	'C" Single Door (in mm)	'C" Double Door (in mm)
Optium F2 MCCB	4W	F1-4	-	750	1050	150	200
	6W	F1-6	-	750	1150	150	200
	8W	F1-8	-	750	1250	150	200
	12W	F1-12	-	750	1450	150	200
SMDB 250	Ways	Outgoing Configuration		'A" in mm	'B" in mm (FP)	'C" Single Door (in mm)	'C" Double Door (in mm)
Optium F3 MCCB	4W	F1-4	-	750	1050	150	200
	6W	F1-6	-	750	1150	150	200
	8W	F1-8	-	750	1250	150	200
	12W	F1-12	-	750	1450	150	200

Dimensional Details

SMDB 400	Ways	Outgoing Configuration		'A" in mm	'B" in mm (TPN/FP)	'C" Single Door (in mm)	'C" Double Door (in mm)
Optium F4(400A) MCCB	4W	F1-4	-	750	1200	150	200
	6W	F1-6	-	750	1300	150	200
	8W	F1-8	-	750	1400	150	200
	12W	F1-12	-	750	1600	150	200
	8W	F1-6	F2-2	850	1400	150	200
	12W	F1-8	F2-4	850	1600	150	200
	12W	F1-10	F2-2	850	1600	150	200
SMDB 630	Ways	Outgoing Configuration		'A" in mm	'B" in mm (TPN/FP)	'C" Single Door (in mm)	'C" Double Door (in mm)
Optium F4(630A) MCCB	4W	F1-4	-	750	1200	150	200
	6W	F1-6	-	750	1300	150	200
	8W	F1-8	-	750	1400	150	200
	12W	F1-12	-	750	1600	150	200
	8W	F1-6	F2-2	850	1400	150	200
	12W	F1-8	F2-4	850	1600	150	200
	12W	F1-10	F2-2	850	1600	150	200

Optipro SMDB Selection Chart

Step 1 : Select SMDB frame size according to an incomer

SMDB 250 SMDB 400 SMDB 630

Step 2 : Select respective Cat. Refs. as per no. of ways
or as per outgoing ways polarity & frame

Step 3 : Select MCCB from given configuration table

Step 4 : Select metering unit with an option to opt

Digital Ammeter,Voltmeter & Phase Indication lamps

Digital MFM,Annunciator & Phase Indication lamps

Step 5 : Add Corner units and cable alleys as per ways

Step 6 : Select Bottom cable entry as per requirement

NOTES

NOTES

NOTES

CORPORATE OFFICE:

V. J. Business Towers, A-6, 1st Floor, Sector-125, Noida-201301, U.P., India. Ph.: +91-0120-3305111
E-mail: customer.care@indoasian.com, Website: www.indoasian.com

CUSTOMER CARE HEAD:

V. J. Business Towers, A-6, 1st Floor, Sector-125, Noida-201301, U.P., India.
Ph.: +91-0120-3305100 E-mail: customer.care@indoasian.com

NORTH

Regional Sales office

DELHI NCR

V. J. Business Towers
A-6, Ground Floor,
Sector-125, Noida-201301
Ph.: 0120-3365300

Branch offices

CHANDIGARH

S.C.O.-11, 2nd Floor,
Sector-26, Madhya Marg,
Chandigarh-160002
Ph.: 0172-3934651

Branch offices

JAIPUR

433, 4th Floor, Ganpati Plaza,
M. I. Road,
Jaipur-302001
Ph.: 0141-4113528

Branch offices

LUCKNOW

301, 3rd Floor, Chintel House,
Station Road,
Lucknow-226001
Ph.: 0522-4013210

SOUTH

Regional Sales office

BANGALORE

787, 1st Floor "Skyline Vista"
15th Cross, 100 Feet Ring Road
J P Nagar 1st Phase
Bangalore-560 078
Tel: 080-46219999

Branch offices

COCHIN

Door No.65/1317, Syda Building,
2nd Floor, Kaloor-Kadavanthra Road,
Kaloor, Ernakulam District,
Kochi-682017 (Kerala)
Ph.: 0484-4055581-88

Branch offices

COIMBATORE

Door No. 83,
Dr. Nanjappa Road,
Coimbatore-641018
Ph.: 0422-2302715

Branch offices

CHENNAI

No.5, 1st Floor, Mahalingapuram Main Road,
Nungambakkam,
Chennai-600034
Ph.: 044-28172096, 28170527

Branch offices

HYDERABAD

312, 3rd Floor,
Amrutha Estates, Himayath Nagar,
Hyderabad-500029
Ph.: 040-66742425

WEST

Regional Sales office

MUMBAI

401 & 408, K.P. Arrum,
Marol Morshi Road, Andheri East,
Mumbai-400059
Ph.: 022-61035800

Branch offices

AHMEDABAD

102, 1st Floor, Shivalik High Street,
Near Mansi Circle, Vastrapur,
Ahmedabad-380015
Ph.: 079-29701351-53

Branch offices

INDORE

202, KK Bafna Arcade,
Janjeerwala Square, Race Course Road,
Indore-452001
Ph.: 0731-4064064

Branch offices

PUNE

1307, 4th Floor, Rajadwar Building,
Off. J. M. Road, Shivaji Nagar,
Pune-411005
Ph.: 8087610722

EAST

Regional Sales office

KOLKATA

"Raikva Building" Room No. 8, 2nd Floor,
3A Ram Mohan Garden Lane,
Beliaghata E.M.Bypass, Kolkata-700010
Ph.: 033-66041503